

**NEW**



**PackSpain**



**siat**  
MAILLIS

# BeeWrap+

Advanced Semi-Automatic  
Mobile Pallet Wrapper



SEMI-AUTOMATIC MOBILE WRAPPER ROBOT

100%  
MADE in ITALY

# BeeWrap+

BeeWrap+ is a mobile wrapping machine used for palletizing goods with stretch film. It is suitable for heavy weight items, unusual shapes, and loads with large dimensions. It is equipped with a digital control panel that allows the user, in an easy and functional way, to alter various parameters and set-up customized wrapping cycle programs.

With sleek design modifications the newly upgraded features the Beewrap+ is also equipped with new AGM dry battery technology.

This guarantees a higher working autonomy (up to 400 cycles\* per charge) and enhances safety within the machine!

## KEY FEATURES

- » **Energy saving** – Automatic shutdown of the machine after 10 minutes of inactivity
- » **Safety First** – Thanks to the new AGM dry battery technology there is no danger related to battery maintenance and acid leaks
- » **Extensive battery duration** – Up to 400 cycles\* with each battery charge
- » **Easier to transport** – Thanks to the AGM technology, batteries are not subject to any transport restrictions
- » **Extensive safety** – BeeWrap incorporates several safety features as standard (such as bumper, light and beeper indicator)
- » **No film waste** – with motorized Pre-Stretch system & independent tension control
- » **Increased production capacity** – Thanks to customized settings
- » **Versatile use** – Suitable for very large and round loads
- » **Flexibility** – Machine is easily moved to various locations
- » **Modular system** – Meeting your individual needs
- » **Easy-to-use** – Due to the simple control concept
- » **CE compliant** – Engineered and produced in Italy according to EU safety standards
- » **Customizable** – Film carriage with clutch (mechanical or electromagnetic) or powered prestretch (240%)

(\* see technical data)



## OPTIONS

- Photocell for black film or colored products
- Remote control
- Film cutting system (on LP carriage only)
- Double tracing wheel
- Non-marking wheels
- Wheels for abrasive floor

Customize your **BeeWrap** with the most suitable carriage for your loads!



M - Mechanical brake



FM - Electromagnetic brake



LP - Powered pre-stretch 240%  
(200% - kit available as option)



Carriage for net/mesh



Operation indicator light and beeper for a safer work condition.

Docs pocket to have everything is needed

Ergonomic, intuitive and easy to use control panel

New selector to restart the stand-by status



Flexibility: rudder for manual moving

Adjustable height tracing wheel



## Machine dimensions

	M/FM Carriages (mm)	LP Carriage (mm)
W	1027	1029
H	1094	1147
2100/2600 column		
L	2310/2810	2310/2810
Weight	316/355	335/380

	M/FM Carriages 2100/2600 column (mm)	LP Carriage 2100/2600 column (mm)
H1	2410/2910	2410/2910
H2	65	65
W1	1255	1255
W2	733	733
L1	1482	1547
L2	1262	1262







180



225



132(L) x 107(w) x 155(H) cm

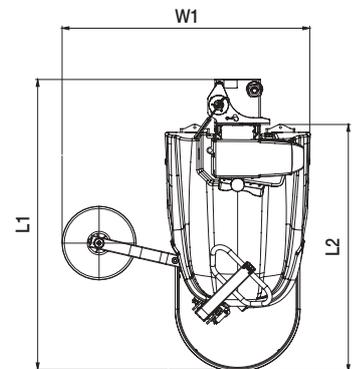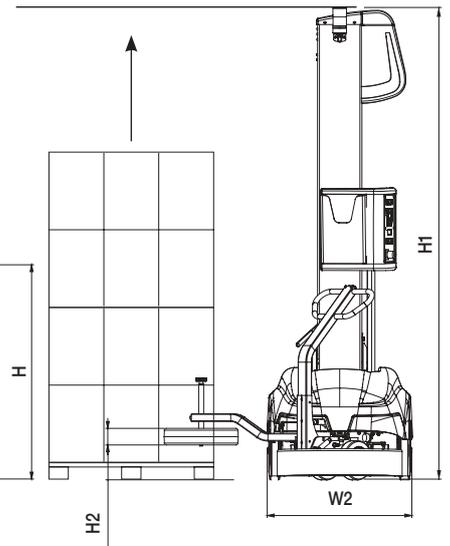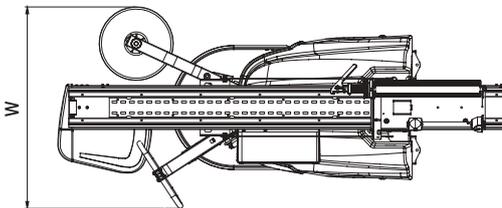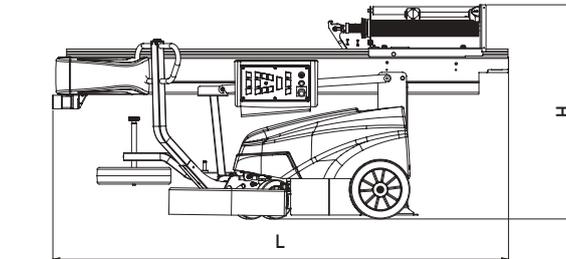

## Technical features

Nr. of pallets for single batteries charge	400*
Rotation speed (m/min.)	50min. / 80max
Up & Down carriage speed (m/min.)	1min. / 5max
Power supply (V)	100 Vac ÷ 240 Vac
Installed power (kW)	0,35 Kw
AGM Batteries	2 x 12V 87 Ah (C5)

Min./Max loading sizes	Min.	Max
L (mm)	500	***
W (mm)	400	***
H (mm)	600	2100/2600
Weight (Kg)	45**	∞

Film roll dimensions	mm
A	250
B	500
C	76
Thickness (µm)	17/23

- \* Test conditions:  
Standard Column 2100mm  
AGM acid batteries  
Pallet dimensions mm 800 x 1200 x 1500 (h),  
up & down cycle, 2 top wraps & 2 bottom  
wraps, film tension 10daN.
- \*\* With film tension of 6daN applied.
- \*\*\* Bulky load can be wrapped up to a total  
perimeter of 26 mt in standard configuration.



PACKLINE SPAIN SYSTEM, S.L  
Telf: +34 610277275  
E-Mail: pcano@packspainsl.com  
www.packspainsl.com